


Configuring AP WebFeeds with ENPS

This document will show you how to set up AP WebFeeds with ENPS. If you require additional assistance and you are in the Americas call ENPS Support at +1-866-ENPS-911 or +1-202-641-9641. If you are outside of the Americas call +44 (0) 20 8225 8685.

1. Use Notepad or another text editor to open `\NWP\NWP.INI` on the ENPS Work drive. In the `[NWP]` section add the entry `webfeeds=1`. Save and close the file.
2. Close the News Wire Profiler. It will re-open automatically.
3. In the News Wire Profiler select **Window** → **AP WebFeeds Wire**. Click the *More* button to view the wire's configuration settings.

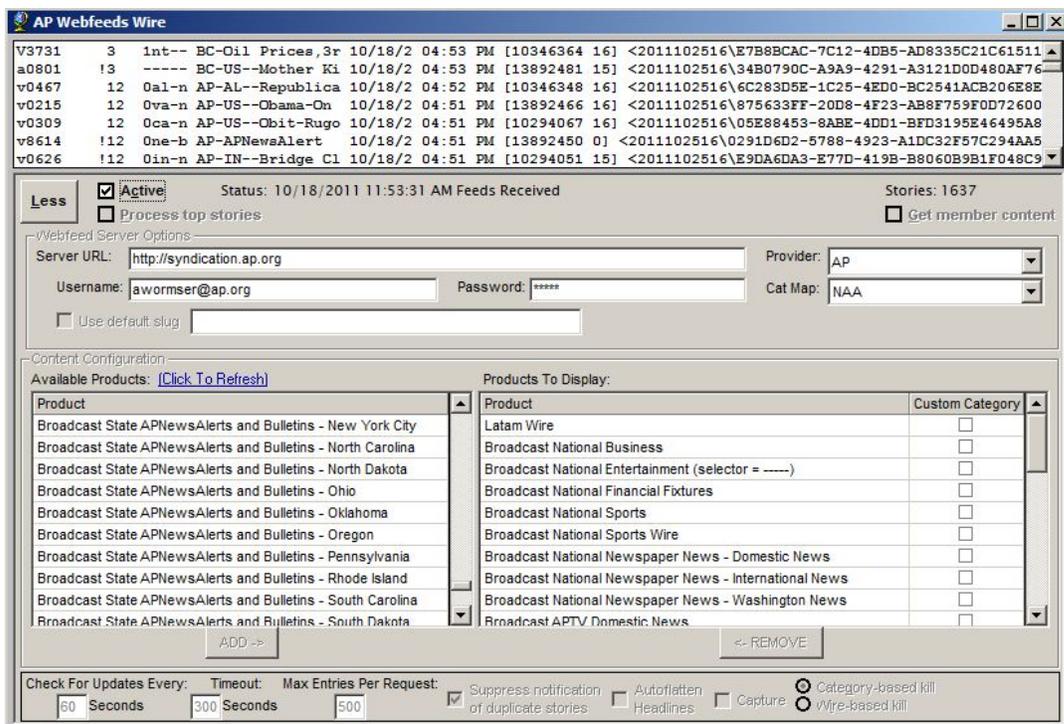

If the *Active* checkbox is selected it must be unchecked before changes can be made to the wire settings.

4. Enter the following information to configure the wire:

Field/Option	Value/Description
Get Member Content	If selected, AP WebFeeds will include content published by the customer site.
Server URL	<code>http://syndication.ap.org</code>
Username, password	Enter the AP WebFeeds login credentials that were provided by AP.
Provider	AP
Cat Map	NAA

5. Select *Click to Refresh* to update the listing in the **Product** column. To include a product click on it then click *ADD*. The feed will appear in the **Products to Display** column.

To create an entry for the product on the **Wires** rover in ENPS select the **Custom Category** checkbox next to the product name. AP WebFeeds content will be displayed in standard categories whether this box is selected or not.

6. The settings at the bottom of the window control how the feed is processed by the News Wire Profiler.

Field/Option	Description
Check For Updates Every	Interval at which the ENPS will check for updated data from the AP WebFeeds server.
Timeout	Length of time ENPS will wait for a response from the AP WebFeeds server before it closes the connection.
Max. Entries Per Request	Largest number of stories that may be downloaded at one time. The maximum is 500.
Suppress notification of duplicate stories	By default, ENPS deletes duplicate wires. If this box is checked the News Wire Profiler will not create an entry in <code>\NWP\NWP.LOG</code> on the ENPS Work drive when duplicate stories are deleted.
Autoflatten Headlines	For AP WebFeeds that contains packages of headlines, such as "Top U.S. Headlines," ENPS can request both the headlines and the individual stories referenced in the package. Enabling this option will increase the amount of network traffic. If unchecked, ENPS will only request the headline package, not the referenced stories which are contained in other feeds. This is the default behavior.
Capture	Save AP WebFeeds XML data to the server. This is useful for troubleshooting problems with the wire.
Category-based kill, wire-based kill	Select <i>Category-based</i> to purge wires according to the wire's <code>Kill</code> setting in the <code>\NWP\NWP.INI</code> on the ENPS Work drive. Select <i>Wire-based</i> to enter a specific number of hours and/or days before the AP WebFeeds story data is purged from the server.

7. Click the *Active* checkbox to enable the feed.

Once the feed is enabled users will have the following story property fields available in AP WebFeeds stories:

Property Field	Description
Story Entities	People, places and organizations related to the story, e.g. "Jon Stewart; Helen Mirren; Jennifer Aniston"
Story Subjects	Topics related to the story, e.g. "Award shows; Arts and Entertainment"
Wire Status	Whether the story is usable or unusable.
Wire Release Time	If a story is listed as unusable, the time when a story can be used.